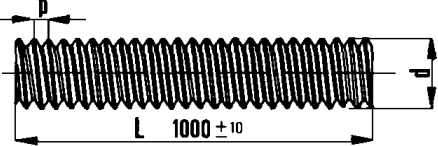
	BARRA FILETTATA Filettatura metrica PG ISO 261-965/2 Materiale secondo EN ISO 898-5 Dimensioni in millimetri		ESTRATTO DIN 975
			RESISTENZA CLASSE 4.8

CODICE 178B

d	6	8	10	12	14	16	18	20
passo	1	1,25	1,5	1,75	2	2	2,5	2,5
Kg. per 3 metri	0,531	0,957	1,5	2,175	2,91	3,99	4,95	6,24


d	22	24	27	30	33	36	39	
passo	2,5	3	3	3,5	3,5	4	4	
Kg. per 3 metri	7,62	9	11,55	14,25	17,7	20,7	24,6	

	BARRA FILETTATA Filettatura metrica PF ISO 261-965/2 Materiale secondo EN ISO 898-5 Dimensioni in millimetri		ESTRATTO DIN 975
			RESISTENZA CLASSE 4.8

CODICE 179

d	8	10	10	12	12	14	16	18	20	22
passo	1	1	1,25	1,25	1,5	1,5	1,5	1,5	1,5	1,5
Kg. per 1 metro	0,319	0,5	0,5	0,725	0,725	0,97	1,33	1,65	2,08	2,54

d	24	27	30	33	36	39	42			
passo	2	2	2	2	3	3	3			
Kg. per 1 metr	3	3,85	4,75	5,9	6,9	8,2	9,4			

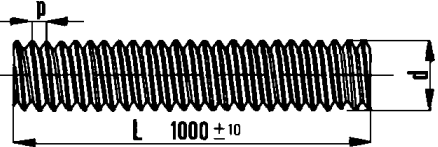	BARRA FILETTATA SINISTRA Filettatura metrica PG ISO 261-965/2 Materiale secondo EN ISO 898-5 Dimensioni in millimetri		ESTRATTO CATALOGO FORNITORE
			RESISTENZA CLASSE 4.8

CODICE 180

d	6	8	10	12	14	16	18	20	22	24
passo	1	1,25	1,5	1,75	2	2	2,5	2,5	2,5	3
Kg. per 1 metro	0,177	0,319	0,5	0,725	0,97	1,33	1,65	2,08	2,54	3

d	27	30	33	36	39					
passo	3	3,5	3,5	4	4					
Kg. per 1 metro	3,85	4,75	5,9	6,9	8,2					